



PROJOLLY SQUARE is a square corner bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

POLISHED ALUMINIUM



POLISHED ALUMINIUM thermo Packed (chrome-gold-titanium-copper)
bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)


POLISHED ALUMINIUM thermo Packed (black-grey gun) bar length 2,7 lm -
Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)

Article	H mm		
PJQSBC 045	4,5		*
PJQSBC 06	6		
PJQSBC 08	8		
PJQSBC 10	10		
PJQSBC 11	11		
PJQSBC 125	12,5		
PJQSBO 08	8		*
PJQSBO 10	10		
PJQSBO 125	12,5		
PJQSB 045	4,5		*
PJQSB 06	6		
PJQSB 08	8		*
PJQSB 10	10		
PJQSB 125	12,5		
PJQSBT 045	4,5		*
PJQSBT 06	6		
PJQSBT 08	8		
PJQSBT 10	10		
PJQSBT 11	11		
PJQSBT 125	12,5		

Article	H mm		
PJQSBN 08	8		
PJQSBN 10	10		
PJQSBN 11	11		
PJQSBN 125	12,5		
PJQSBG 06	6		*
PJQSBG 08	8		
PJQSBG 10	10		*
PJQSBG 11	11		
PJQSBG 125	12,5		

PJQS... 045		H 4,5 mm
PJQS... 06		H 6 mm
PJQS... 08		H 8 mm
PJQS... 10		H 10 mm
PJQS... 11		H 11 mm
PJQS... 125		H 12,5 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

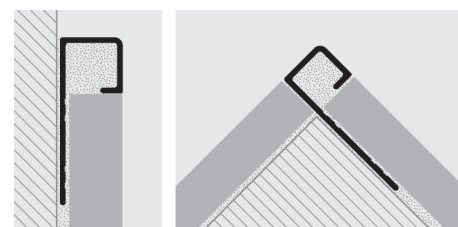

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

POLISHED					
BC - Pol. chrome alum.	BO - Pol. gold alum.	BR - Pol. copper alum.	BT - Pol. titanium alum.	BN - Pol. black alum.	BG - Pol. grey gun alum.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED ALUMINIUM / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - POLISHED ALUMINIUM

Article	H mm		
CPJQSBC .../...	045/06/08/10/11/125		
TPJQSBC .../...	045/06/08/10/11/125		
CPJQSBO .../...	8/10/125		
TPJQSBO .../...	8/10/125		
CPJQSB 045/06/08/10/125			
TPJQSB 045/06/08/10/125			
CPJQSBT .../...	045/06/08/10/11/125		
TPJQSBT .../...	045/06/08/10/11/125		
CPJQSBN .../...	08/10/11/125		
TPJQSBN .../...	08/10/11/125		

CPJQSBG .../... 06/08/10/11/125


TPJQSBG .../... 06/08/10/11/125

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSB 10/10

JOINTS - PLASTIC

Article	H mm		
GIJQ .../...	045/06/08/10/11/125		

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10

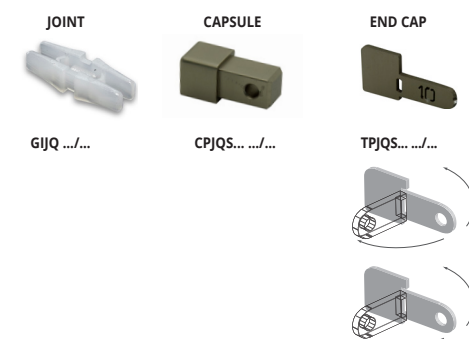

News 2024

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed