




Uncoupling and waterproofing membrane in polyethylene with a thickness of 5.5 mm. The membrane is provided on top with pseudo-square reliefs which create channels for fixing the electric heating cable. On the back of the membrane there is a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring.

PRODESO® HEAT GRIP 5 STICK SYSTEM

PRODESO® HEAT GRIP 5 STICK MEMBRANE

	Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet			
NEW	PDESHG5ST 151	1	15	5,5	9			
NEW	PDESHG5ST 051	1	5	5,5	30			

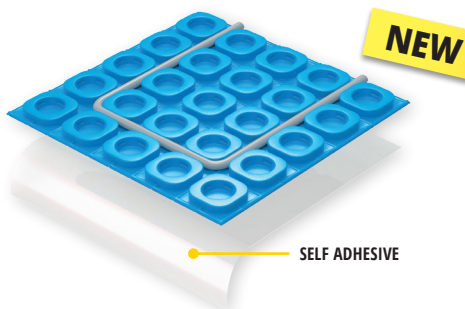

PRODESO® ECO is an uncoupling membrane, which allows vapour management and heat distribution with only 4 mm thickness. It is composed of a polyethylene sheet, with square base truncated pyramid cavities, to which a polypropylene non-woven fabric is thermowelded and ensures the membrane is bonded to the support. The uncoupling and vapour management features of PRODESO® ECO allow it to be laid even on not perfectly cured supports. Also available in self-adhesive version **PRODESO® ECO STICK**.

PRODESO® ECO / PRODESO® ECO STICK MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE


PRODESO® ECO MEMBRANE

	Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet			
NEW	PDESEC 3530	1	30	4	9			


PRODESO® ECO STICK MEMBRANE

	Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet			
NEW	PDESECST 3530	1	30	4	9			

PRODESO® ECO



PRODESO® ECO
STICK



L 30m




PRODESO® ECO

L 30m



PRODESO® ECO
STICK

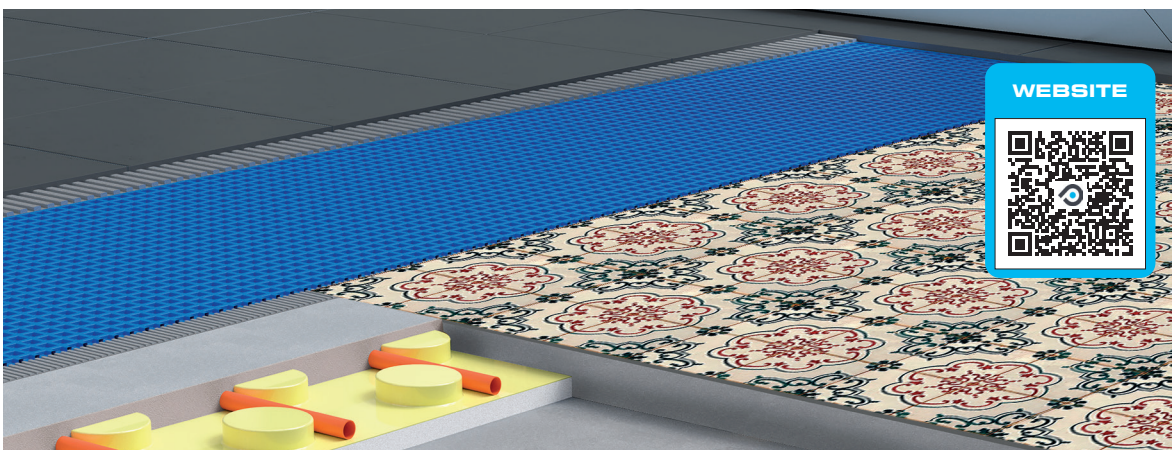

WEBSITE



NEW = News 2024

* = Production on demand with minimum quantity of 1000 lm Production delay 4/5 weeks. Price to be agreed