



PROSHOWER PROFILE GLASS

VARNISHED ALUMINIUM

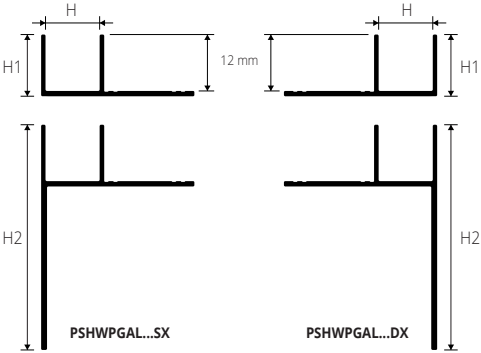


PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a slope of 2%. Due to its particular shape and finish in anodized and varnished aluminium, it covers and decorates the visible side of the screed.

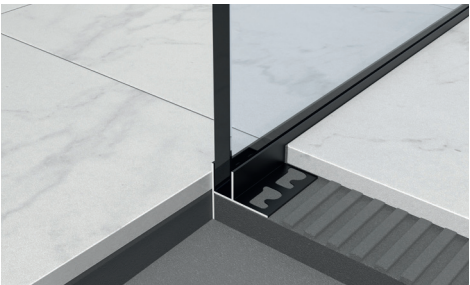


VARNISHED ALUMINIUM BLACK LINE
thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm
PSHWPGAL 100DX- 110	12,5	13,7	30	100
PSHWPGAL 150DX- 110	12,5	13,7	40	150
PSHWPGAL 200DX- 110	12,5	13,7	50	200
PSHWPGAL 100SX- 110	12,5	13,7	30	100
PSHWPGAL 150SX- 110	12,5	13,7	40	150
PSHWPGAL 200SX- 110	12,5	13,7	50	200

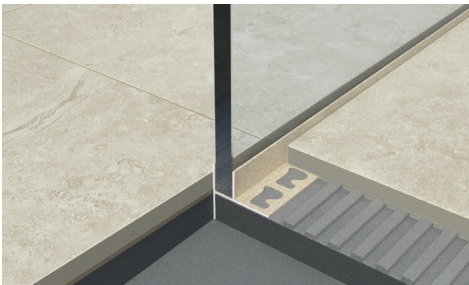


VARNISHED ALUMINIUM STONE LINE
thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm
PSHWPGAL 100DX- SL..	12,5	13,7	30	100
PSHWPGAL 150DX- SL..	12,5	13,7	40	150
PSHWPGAL 200DX- SL..	12,5	13,7	50	200
PSHWPGAL 100SX- SL..	12,5	13,7	30	100
PSHWPGAL 150SX- SL..	12,5	13,7	40	150
PSHWPGAL 200SX- SL..	12,5	13,7	50	200



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

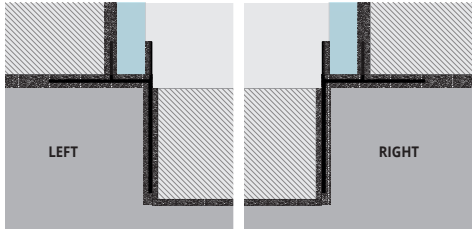


1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. 2. Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.


STONE LINE						VARNISHED
SL01 - Stone white	SL02 - Stone cream	ON DEMAND	SL04 - Stone sand	SL05 - Stone gray	ON DEMAND	110 - Varnished black alum.
ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND	
SL07 - Stone antragra	SL08 - Stone antradark	SL09 - Stone bronze	SL12 - Stone black	SL13 - Stone oyster grey	SL14 - Stone taupe grey	
ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND			
SL15 - Stone grey smoke	SL16 - Stone grey gun	SL17 - Stone tobacco	SL18 - Stone white cement			

PROSHOWER PROFILE

VARNISHED ALUMINIUM

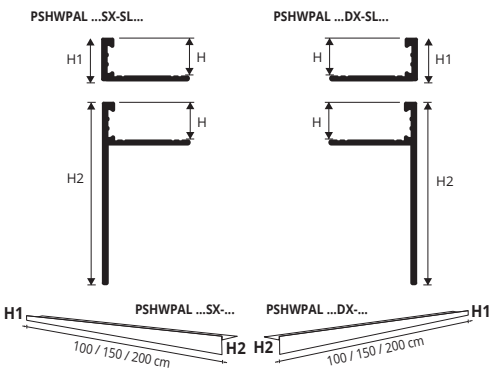

PROSHOWER PROFILE is a profile for floor level showers in aluminium for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.

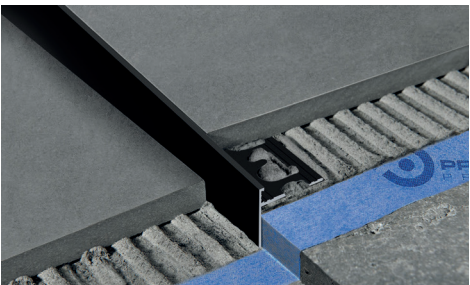

VARNISHED ALUMINIUM BLACK LINE
thermo packed - Pack. 1 Pc


Article	H mm	H1 mm	H2 mm	L cm
PSHWPAL 1010DX-110	10	11	28	100
PSHWPAL 1015DX-110	10	11	38	150
PSHWPAL 1020DX-110	10	11	48	200
PSHWPAL 1010SX-110	10	11	28	100
PSHWPAL 1015SX-110	10	11	38	150
PSHWPAL 1020SX-110	10	11	48	200



VARNISHED ALUMINIUM STONE LINE
thermo packed - Pack. 1 Pc

Article	H mm	H1 mm	H2 mm	L cm
PSHWPAL 1010DX-SL...	10	11	28	100
PSHWPAL 1015DX-SL...	10	11	38	150
PSHWPAL 1020DX-SL...	10	11	48	200
PSHWPAL 1010SX-SL...	10	11	28	100
PSHWPAL 1015SX-SL...	10	11	38	150
PSHWPAL 1020SX-SL...	10	11	48	200

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

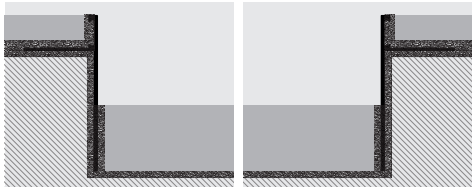

1. Choose "PROSHOWER PROFILE" according to the desired length. 2. Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. 6. Insert the sheet of glass and seal.

STONE LINE						VARNISHED
SL01 - Stone white	SL02 - Stone cream	ON DEMAND	SL04 - Stone sand	SL05 - Stone gray	ON DEMAND	110 - Varnished black alum.
ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND	
SL07 - Stone antragra	SL08 - Stone antradark	SL09 - Stone bronze	SL12 - Stone black	SL13 - Stone oyster grey	SL14 - Stone taupe grey	
ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND			
SL15 - Stone grey smoke	SL16 - Stone grey gun	SL17 - Stone tobacco	SL18 - Stone white cement			

News 2024

* = Production on demand with minimum quantity of 10 pcs. Production delay 4/5 weeks. Price to be agreed