**PROSOL 18-30-35-40** in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

# PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH SELF-ADHESIVE WITH PROTECTIVE FILM







**STAINLESS ST. 1.4016 with adhesive thermo packed**
bar length **2,7 lm** - pack. **40 Pcs - 108 lm (L 35/40 mm - 54 lm)**

| Article | Width-thick. |
|---|---|
| PLSAC 18A | 18 mm - 10/10 |
| PLSAC 30A | 30 mm - 10/10 |
| PLSAC 35A | 35 mm - 10/10 |
| PLSAC 40A | 40 mm - 12/10 |

**STAINLESS ST. 1.4016 with adhesive thermo packed** - bar length **0,83 lm** - pack. **20 Pcs** — ECO BLISTER

| Article | Width-thick. |
|---|---|
| PLSAC 308A | 30 mm - 10/10 |
| PLSAC 358A | 35 mm - 10/10 |

**STAINLESS ST. 1.4016 with adhesive thermo packed** - bar length **0,93 lm** - pack. **20 Pcs** — ECO BLISTER

| Article | Width-thick. |
|---|---|
| PLSAC 309A | 30 mm - 10/10 |
| PLSAC 359A | 35 mm - 10/10 |

**COLOURS**

**AC** - Polished stainless steel 1.4016

**STAINLESS ST. 1.4016 with adhesive thermo packed** - bar length **0,83 lm** - pack. **20 Pcs** — SELF PACK

| Article | Width-thick. |
|---|---|
| PLSAC 308AS | 30 mm - 10/10 |
| PLSAC 358AS | 35 mm - 10/10 |

**STAINLESS ST. 1.4016 with adhesive thermo packed** - bar length **0,93 lm** - pack. **20 Pcs** — SELF PACK

| Article | Width-thick. |
|---|---|
| PLSAC 309AS | 30 mm - 10/10 |
| PLSAC 359AS | 35 mm - 10/10 |
| PLSAC 409AS | 40 mm - 12/10 |


**STAINLESS ST. 1.4016 with adhesive thermo packed** - bar length **1,03 lm** - pack. **20 Pcs** — SELF PACK

| Article | Width-thick. |
|---|---|
| PLSAC 3010AS | 30 mm - 10/10 |


**STAINLESS ST. 1.4016 with adhesive thermo packed** - bar length **1,66 lm** - pack. **20 Pcs** — SELF PACK

| Article | Width-thick. |
|---|---|
| PLSAC 3016AS | 30 mm - 10/10 |
| PLSAC 3516AS | 35 mm - 10/10 |


**PLSAC 18A**





**PLSAC 30A/3010AS/309A/309AS/308A/308AS/3016AS**





**PLSAC 35A/359A/359AS/358A/358AS**





**PLSAC 40A/409AS**




**EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS**

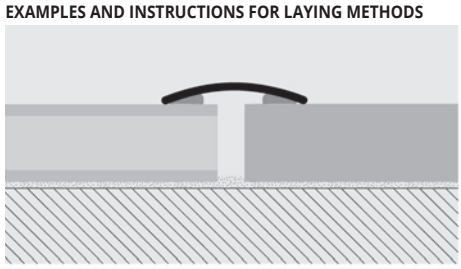

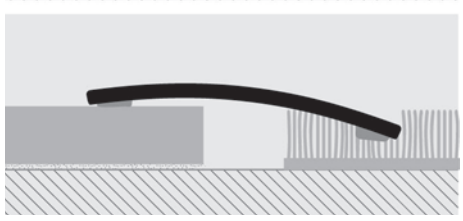

**1.** Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

