PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

PROMOQUETTE GIN

ANODIZED ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED






ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM ADHESIVE
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm		
PMGAA 813A	8/13		

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM PUNCHED
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**


Article	H mm		
PMGAA 813F	8/13		
PMGAO 813F	8/13		
PMGAB 813F	8/13		
PMGAT 813F	8/13		

COLOURS




AA - Anodized silver alum. **AO** - Anodized gold alum. **AT** - Anodized titanium alum. **AB** - Anodized bronze alum.


PMGD... 813A

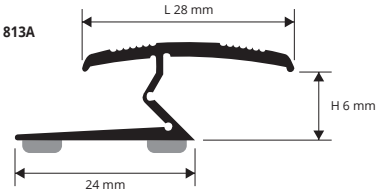

PMG... 813F

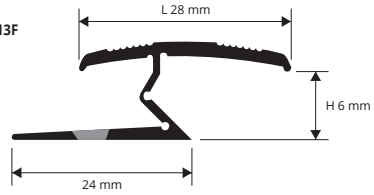

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

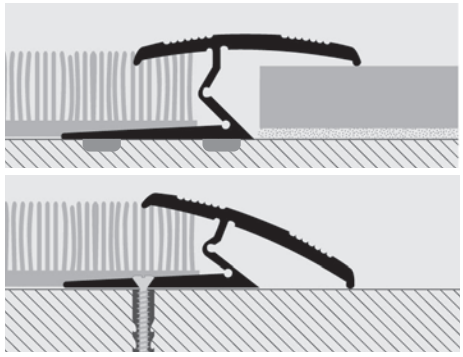

1. Cut the profile to the necessary length. **2.** Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. **3.** Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. **4.** Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.