
PROTERMSTEP ACC


POLISHED, BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMSTEP ACC is the new step cover profile made of stainless steel. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile. Reversible profile.


PTSP... 0815




PTSP.. 10125



PTSP... 1530

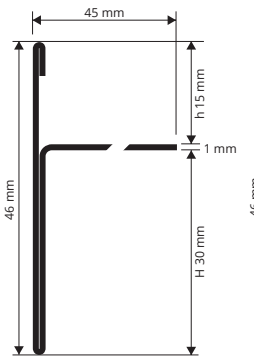

PTSP... 2025

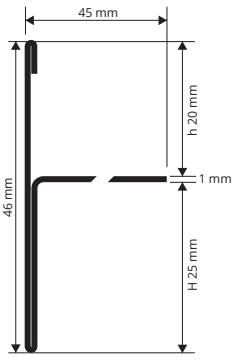

EXAMPLES OF LAYING for instructions see the product below





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **15 Pcs** - **40,5 lm**

Article	h / H mm		
PTSPAC 0815	08 / 15		
PTSPAC 10125	10 / 12,5		
PTSPAC 1530	15 / 30		
PTSPAC 2025	20 / 25		

EXTERNAL CORNERS - pack. **10 Pcs**

Article	h / H mm	
REPTSAC 0815/1	08 / 15	
REPTSAC 10125/1	10 / 12,5	
REPTSAC 1530/1	15 / 30	
REPTSAC 2025/1	20 / 25	

JUNCTION H 10 - 12,5 - 15 - 20 mm - pack. **10 Pcs**


Article	h / H mm	
GIPTSAC 0815/1	08 / 15	
GIPTSAC 10125/1	10 / 12,5	
GIPTSAC 1530/1	15 / 30	
GIPTSAC 2025/1	20 / 25	



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **15 Pcs** - **40,5 lm**

Article	h / H mm		
PTSPACS 0815	08 / 15		
PTSPACS 10125	10 / 12,5		
PTSPACS 1530	15 / 30		
PTSPACS 2025	20 / 25		


COLOURS




AC - Polished stainless st. AISI 304/1.4301-V2A

ACS - Brushed stainless st. AISI 304/1.4301-V2A

JOINT GIPTSAC ..



EXTERNAL CORNER (WELDED) REPTSAC ..




PROTERMSTEP ALL


NATURAL AND ANODIZED SILVER ALUMINIUM

PROTERMSTEP ALL is the new step cover profile made of natural and anodized aluminium. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile.


PTSPAN/AA 08




PTSPAN/AA 10




PTSPAN/AA 125



PTSPAN/AA 15



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

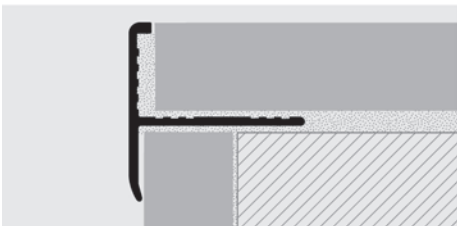




NATURAL ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm		
PTSPAN 08	8		
PTSPAN 10	10		
PTSPAN 125	12,5		
PTSPAN 15	15		

1. Choose the PROTERMSTEP in the required width and colour according to the thickness of the tile (stairs). **2.** First fix the riser part, placing it at the correct and final height. **3.** Fill the empty spaces under the profile with the tile adhesive. **4.** Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.

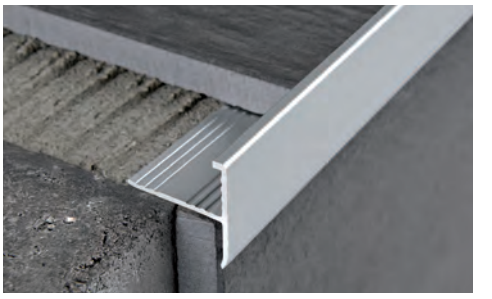

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm		
PTSPAA 08	8		
PTSPAA 10	10		
PTSPAA 125	12,5		
PTSPAA 15	15		

COLOURS



AN - Natural aluminium

AA - Anodized silver aluminium