PROJOLLY QUART is a quarter-circle rounded bead profile in brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and (only brushed version) like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY QUART

BRUSHED POLISHED, BRUSHED AND VARNISHED ALUMINIUM



BRUSHED POLISHED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm (H 12,5 mm,15 mm -** pack. **20 Pcs)**

Article	H mm		
PJQTBS 08	8		
PJQTBS 10	10		
PJQTBS 125	12,5		
PJQTRS 10	10		
PJQTRS 125	12,5		
PJQTTS 08	8		
PJQTTS 10	10		
PJQTTS 125	12,5		
PJQTNS 10	10		
PJQTBGS 10	10		




VARNISHED ALUMINIUM thermo packed - bar length **2,7 M**
pack. **20 Pcs - 54 lm** (white colour **40 Pcs - 108 lm**)

Article	H mm		
PJQTA 06-01	6		
PJQTA 08-01	8		
PJQTA 10-01	10		
PJQTA 11-01	11		
PJQTA 125-01	12,5		


BRUSHED ANTIQUE BRONZE ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pc - 108 lm (H 12,5 mm,15 mm -** pack. **20 Pcs)**

Article	H mm		
PJQTBRAS 10	10		
PJQTBRAS 125	12,5		

BRAS - ITEM AVAILABLE WHILE STOCKS LAST.

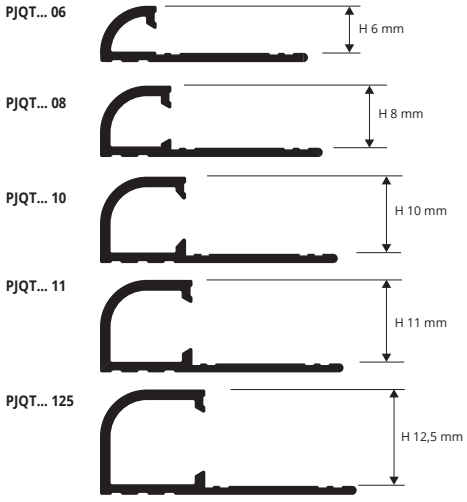


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

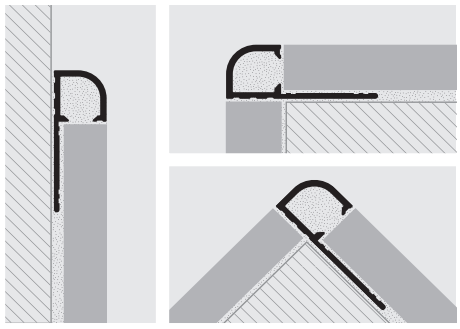

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY QUART" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

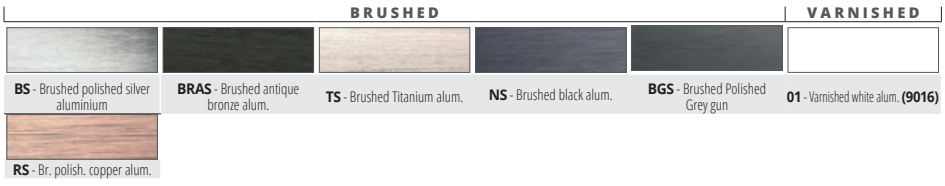

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED BRUSHED, VARNISHED ALUMINIUM/ PLASTIC

CAPSULES & CAPS - POLISHED BRUSHED ALUMINIUM

Article	H mm	
CPJQTBS .../1	08/10/125	
IPJQTBS .../1	08/10/125	
TPJQTBS .../1	08/10/125	
CPJQTTS .../1	08/10/125	
IPJQTTS .../1	08/10/125	
TPJQTTS .../1	08/10/125	
CPJQTBGS 10/1	10	
IPJQTBGS 10/1	10	
TPJQTBGS 10/1	10	
CPJQTRS .../1	10/125	
IPJQTRS .../1	10/125	
TPJQTRS .../1	10/125	
CPJQTNS 10/1	10	
IPJQTNS 10/1	10	
TPJQTNS 10/1	10	

Choose the desired height:
Ex.: 4,5 mm capsule in 1 Pcs Pack - **CPJQTBS 10/1**

CAPSULES & CAPS - POLISHED BRUSHED ALUMINIUM

Article	H mm	
CPJQTBRAS .../1	10/125	
IPJQTBRAS .../1	10/125	
TPJQTBRAS .../1	10/125	

CAPSULES & CAP - VARNISHED ALUMINIUM

Article	H mm	
CPJQTA ...-01/1	06/08/10/11/125	
IPJQTA ...-01/1	06/08/10/11/125	
TPJQTA ...-01/1	06/08/10/11/125	

JOINTS - PLASTIC

Article	H mm	
GIJQT ...	06/08/10/11/125	

EXTERNAL CAPSULES



CPJQT... .../1

INTERNAL CAPSULES



IPJQT... .../1

END CAP



TPJQT... .../1

JOINT



GIJQT...



