

PROSHOWER PROFILE GLASS

VARNISHED ALUMINIUM

PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a slope of 2%. Due to its particular shape and finish in anodized and varnished aluminium, it covers and decorates the visible side of the screed.

NEWS KALEIDOS

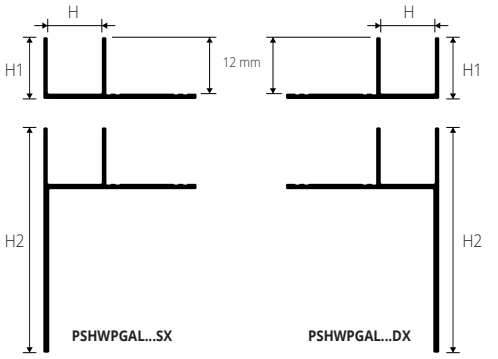

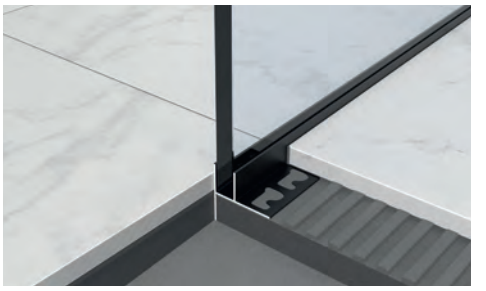


VARNISHED ALUMINIUM EASY LINE
thermo packed - Pack. **1 Pc**

Article	H mm	H1 mm	H2 mm	L cm
PSHWPGAL 100DX-EYP11	12,5	13,7	30	100
PSHWPGAL 150DX-EYP11	12,5	13,7	40	150
PSHWPGAL 200DX-EYP11	12,5	13,7	50	200
PSHWPGAL 100SX-EYP11	12,5	13,7	30	100
PSHWPGAL 150SX-EYP11	12,5	13,7	40	150
PSHWPGAL 200SX-EYP11	12,5	13,7	50	200

PSHWPGAL...SX 2% SLOPE



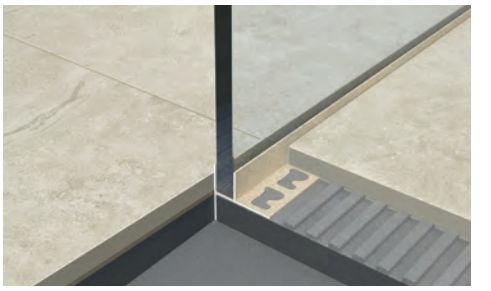


VARNISHED ALUMINIUM STONE LINE
thermo packed - Pack. **1 Pc**

Article	H mm	H1 mm	H2 mm	L cm
PSHWPGAL 100DX- SL..	12,5	13,7	30	100
PSHWPGAL 150DX- SL..	12,5	13,7	40	150
PSHWPGAL 200DX- SL..	12,5	13,7	50	200
PSHWPGAL 100SX- SL..	12,5	13,7	30	100
PSHWPGAL 150SX- SL..	12,5	13,7	40	150
PSHWPGAL 200SX- SL..	12,5	13,7	50	200

PSHWPGAL...DX 2% SLOPE



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

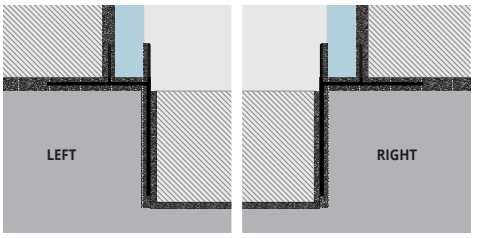

1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. **2.** Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal.

KALEIDOS

STONE LINE




SL01 - Stone white | **SL02** - Stone cream | **SL03** - Stone greyvory | **SL04** - Stone sand | **SL05** - Stone gray | **SL06** - Stone cristal gray



SL13 - Stone oyster grey | **SL08** - Stone antradark

EASY LINE




EYP11 - MATT black varnished


PROSHOWER PROFILE

VARNISHED ALUMINIUM

PROSHOWER PROFILE is a profile for floor level showers in aluminium for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.


NEWS KALEIDOS

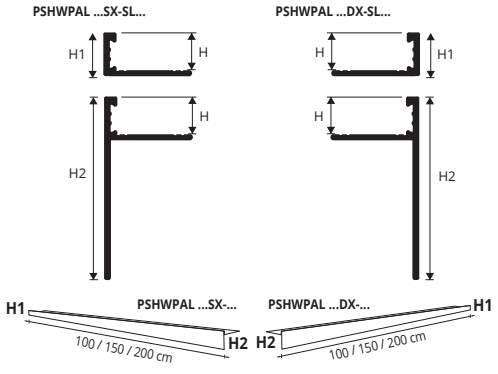

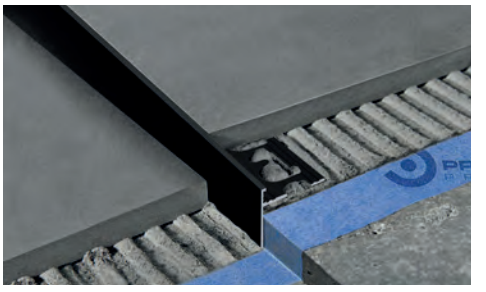

VARNISHED ALUMINIUM EASY LINE
thermo packed - Pack. **1 Pc**


Article	H mm	H1 mm	H2 mm	L cm
PSHWPAL 1010DX-EYP11	10	11	28	100
PSHWPAL 1015DX-EYP11	10	11	38	150
PSHWPAL 1020DX-EYP11	10	11	48	200
PSHWPAL 1010SX-EYP11	10	11	28	100
PSHWPAL 1015SX-EYP11	10	11	38	150
PSHWPAL 1020SX-EYP11	10	11	48	200

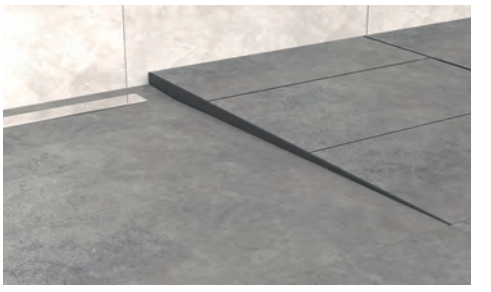

VARNISHED ALUMINIUM STONE LINE
thermo packed - Pack. **1 Pc**

Article	H mm	H1 mm	H2 mm	L cm
PSHWPAL 1010DX-SL...	10	11	28	100
PSHWPAL 1015DX-SL...	10	11	38	150
PSHWPAL 1020DX-SL...	10	11	48	200
PSHWPAL 1010SX-SL...	10	11	28	100
PSHWPAL 1015SX-SL...	10	11	38	150
PSHWPAL 1020SX-SL...	10	11	48	200

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

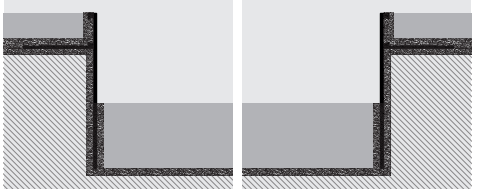

1. Choose "PROSHOWER PROFILE" according to the desired length. **2.** Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal.

KALEIDOS

STONE LINE



SL01 - Stone white | **SL02** - Stone cream | **SL03** - Stone greyvory | **SL04** - Stone sand | **SL05** - Stone gray | **SL06** - Stone cristal gray



SL13 - Stone oyster grey | **SL08** - Stone antradark

EASY LINE



EYP11 - MATT black varnished

PROGRESS PROFILES