TERMINAL

ALUMINIUM COVERED WOODEN FINISHES AND ANODIZED FINISHES

The **TERMINAL** range comprises a large assortment of perimeter joint or edging profiles in aluminium covered in wooden finishes are available, plus anodized finishes. They are used in various laying situations. Ideal as an edging profile for wood parquet, laminate and melamine-coated floors. They finish the floor where it joins to abutting surfaces, windows, glazed areas, doors, terraces and may also be used for joining two floors: wood/tiles, wood/carpeting.





ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**
(H 11 - H 13 - H 15 mm - 80 lm)

Article	H mm		
PINT... 07	7		
PINT... 09	9		
PINT... 11	11		
PINT... 13	13		
PINT... 15	15		

ALUMINIUM COVERED (4 wooden finishes)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**
(H 11 - H 15 mm - 80 lm)

Article	H mm		
PINT... 09	9		
PINT... 11	11		
PINT... 15	15		

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-34W-37W-54W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07 (chosen finish anod. gold) PINTAO 07.

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed
bar length **0,90 lm - 20 Pcs - BLISTER PACKS** SELF PACK


Article	H mm	
PINT... 07S	7 / 8	
PINT... 09S	9 / 10	
PINT... 11S	11 / 12	
PINT... 15S	15 / 16	

ALUMINIUM COVERED (4 wooden finishes)
thermo packed
bar length **0,90 lm - 20 Pcs - BLISTER PACKS** SELF PACK

Article	H mm	
PINT... 09S	9 / 10	
PINT... 11S	11 / 12	
PINT... 15S	15 / 16	

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-34W-37W-54W.
The code of the selected colour must be added to the article code. E.g.: PINT... 07S (chosen finish anod. gold) PINTAO 07S.

PINT... 07

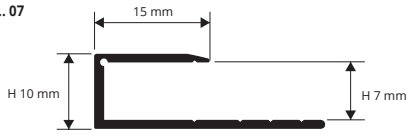

PINT... 09




PINT... 11




PINT... 13



PINT... 15

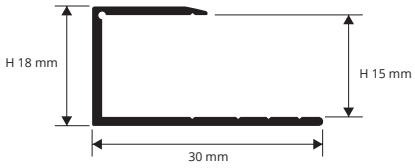


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

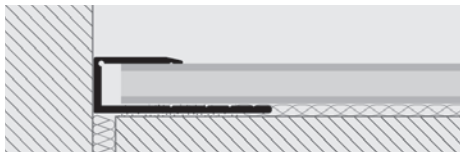


1. Choose the TERMINAL according to the required height and finish and fix with screws and screw anchors or with glue/silicone; the profile must be placed next to the abutting surface e.g. wall, glazing, etc. **2.** Align the laminate/melamine/wood floor, ensuring that a large enough gap is left to accommodate the natural expansion between the floor and the profile (approx. 3/10mm on one side).

ANODIZED COLOURS



AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium

*** ANODIZED COLOURS ON DEMAND**



AT - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium

WOODEN COLOURS



05W - Light oak (strip) | **34W** - Havana oak | **37W** - Carvi oak | **54W**

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**