PROJOLLY TRIANGLE is a triangle-shaped bead profile in brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in different finishes make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY TRIANGLE

NATURAL CHROMED AND ANTIQUE BRASS





PJTR... 10



PJTR... 125




SUPER POLISHED CHROMED BRASS
thermo packed bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm		
PJTROC 10	10		
PJTROC 125	12,5		

ANTIQUE BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm		
PJTROB 10	10		
PJTROB 125	12,5		


COLOURS



OC - Chromed brass

OB - Antique brass

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

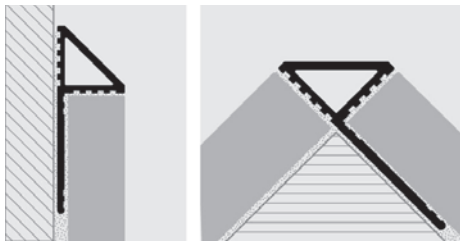

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

