**PROJOLLY ANGLE 135** is a polished and satin stainless steel profile that can be use as protection for the 135° corners of coverings. Its particular section, the availability in 2 different finishes make **PROJOLLY ANGLE 135** a much sought-after profile that allows an elegant workmanlike application.

# PROJOLLY ANGLE 135

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A



**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film**
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**


| Article | H mm | | |
|---|---|---|---|
| PJTR135AC 08 | 8 | | |
| PJTR135AC 10 | 10 | | |
| PJTR135AC 11 | 11 | | |
| PJTR135AC 125 | 12,5 | | |



**BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film**
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

| Article | H mm | | |
|---|---|---|---|
| PJTR135ACS 08 | 8 | | |
| PJTR135ACS 10 | 10 | | |
| PJTR135ACS 11 | 11 | | |
| PJTR135ACS 125 | 12,5 | | |


**COLOURS**




**AC** - Polished stainless steel AISI 304/1.4301-V2A
**ACS** - Brushed stainless steel AISI 304/1.4301-V2A

**SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS**



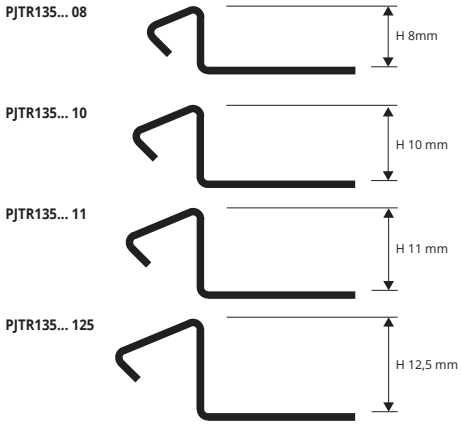


**EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS**

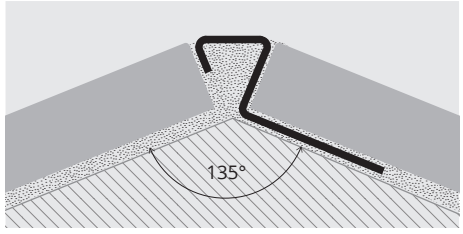


**1.** Choose "PROJOLLY ANGLE 135" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY ANGLE 135" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY ANGLE 135" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.