
PROTERMINAL

CHROMED BRASS,BRUSHED BRASS AND ANTIQUE BRASS

PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.





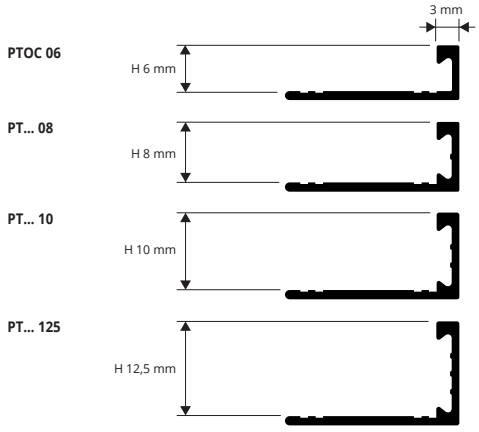

CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm		
PTOC 06	6		
PTOC 08	8		
PTOC 10	10		
PTOC 125	12,5		

BRUSHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H mm		
PTOS 06	6		
PTOS 08	8		
PTOS 10	10		
PTOS 125	12,5		

ANTIQUE BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm		
PTOB 08	8		
PTOB 10	10		
PTOB 125	12,5		

OC - Chromed brass | **OB** - Antique brass | **OS** - Brushed brass

EXEMPLES OF LAYING

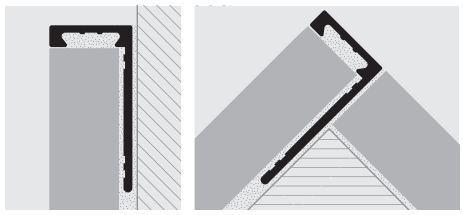

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES THREE-WAYS JOINTS

CHROMED BRASS,BRUSHED BRASS AND ANTIQUE BRASS

CAPSULES - pack. **1 Pcs**

Article	H mm	
CPTOC 06/1	6	
CPTOS 06/1	6	
CPTOC 08/1	8	
CPTOB 08/1	8	
CPTOS 08/1	8	
CPTOC 10/1	10	
CPTOB 10/1	10	
CPTOS 10/1	10	
CPTOC 125/1	12,5	
CPTOB 125/1	12,5	
CPTOS 125/1	12,5	



