
PROEDGE AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROEDGE AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.



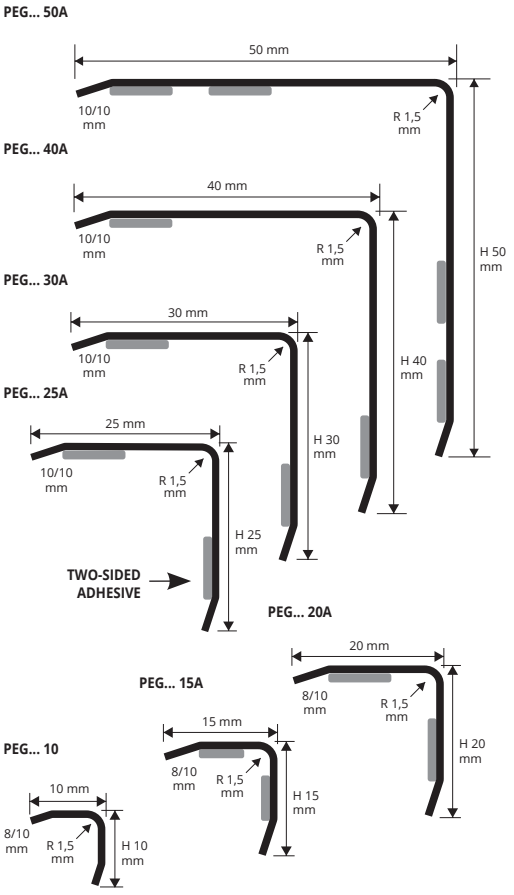

POLISHED AND BRUSHED STAINLESS STEEL
with protective film - bar length **2,7 lm** - pack. **81 lm - 8/10 mm**

Article	LxH mm		
PEGAC 10	10 x 10		
PEGACS 10	10 x 10		

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **81 lm - 8/10 mm**

Article	LxH mm		
PEGAC 15A	15 x 15		
PEGACS 15A	15 x 15		
PEGAC 20A	20 x 20		
PEGACS 20A	20 x 20		

For items without adhesive, write the item without the last A.
E.g.: PEGAC 15

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

Suitable for use in contact with foodstuffs.



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **40,5 lm -10/10 mm**

Article	LxH mm		
PEGAC 25A	25 x 25		
PEGACS 25A	25 x 25		
PEGAC 30A	30 x 30		
PEGACS 30A	30 x 30		

For items without adhesive write the item without the last A.
E.g.: PEGAC 10

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **27 lm - 10/10 mm**

Article	LxH mm		
PEGAC 40A	40 x 40		
PEGACS 40A	40 x 40		
PEGAC 50A	50 x 50		
PEGACS 50A	50 x 50		

For items without adhesive, write the item without the last A.
E.g.: PEGAC 40


PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

PROEDGE OT

POLISHED AND CHROMED BRASS


PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE OT** a much sought-after profile that allows an elegant workmanlike application.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

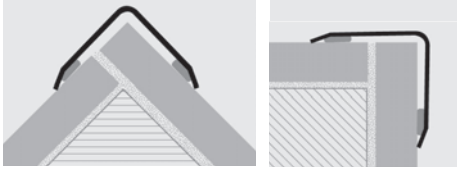


1. Choose "PROEDGE OT" according to the desired finish and width. **2.** Cut "PROEDGE OT" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



OC - Chromed brass
OL - Polished Brass

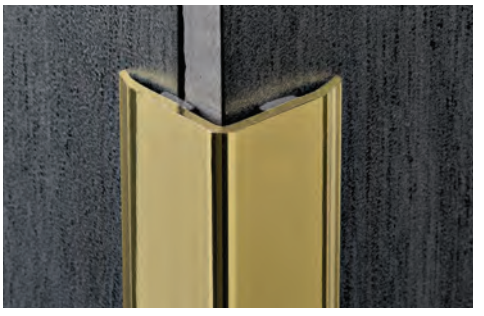

POLISHED AND CHROMED BRASS
bar length **2,7 lm** - pack. **54 lm - 8/10 mm**

Article	LxH mm		
PEGOL 10	10 x 10		
PEGOC 10	10 x 10		

POLISHED AND CHROMED BRASS WITH ADHESIVE
bar length **2,7 lm** - pack. **54 lm - 8/10 mm**

Article	LxH mm		
PEGOL 15A	15 x 15		
PEGOC 15A	15 x 15		
PEGOL 20A	20 x 20		
PEGOC 20A	20 x 20		

For items without adhesive, write the item without the last A.
E.g.: PEGOL 15



POLISHED BRASS WITH ADHESIVE
bar length **2,7 lm** - pack. **27 lm - 10/10 mm**

Article	LxH mm		
PEGOL 25A	25 x 25		
PEGOL 30A	30 x 30		