

PROINTER AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316/1.4401-V4A

PROINTER AC 316 is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

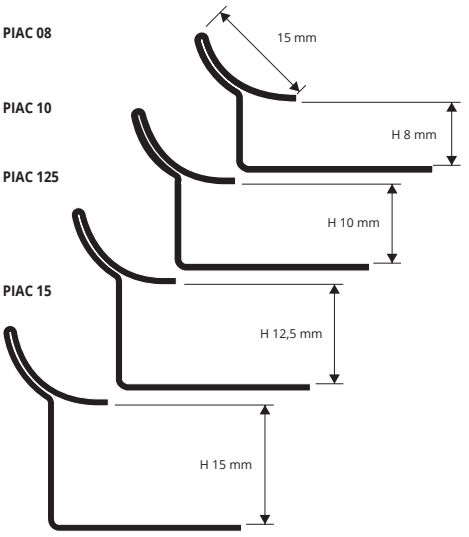

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

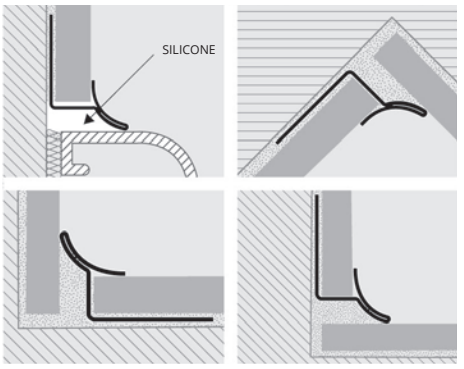

1. Choose "PROINTER AC 316" according to the tile thickness and desired finish. **2.** Cut "PROINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROINTER AC 316" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm		
PIACM 08	8		
PIACM 10	10		
PIACM 125	12,5		



BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm		
PIACMS 08	8		
PIACMS 10	10		
PIACMS 125	12,5		

COLOURS



ACM - Polished stainless steel AISI 316/1.4404-V4A
ACMS - Brushed stainless steel AISI 316/1.4404-V4A

PROINTER JUNCTIONS
Polished stainless steel AISI 316/1.4404-V4A

Article	
RIPISACM/1	
RITPISACM/1	
REPISACM/1	
GPISACM/1	
TPISACM/1	

JOINTS CAN ALSO BE USED FOR PROINTER KL ACC



PROINTER JUNCTIONS
Brushed stainless steel AISI 316/1.4404-V4A


Article	
RIPISACMS/1	
RITPISACMS/1	
REPISACMS/1	
GPISACMS/1	
TPISACMS/1	

PROINTER KL ACC


STAINLESS STEEL AISI 316/1.4401-V4A

PROINTER KL ACC 316 is a cove-shaped profile in stainless steel AISI 316/1.4404-V4A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL 316** a much sought after profile.

PIKL... 15




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

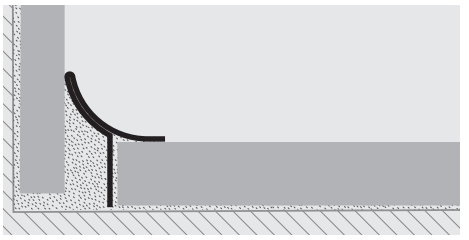


1. Choose "PROINTER KL ACC 316" according to the desired finish. **2.** Cut "PROINTER KL ACC 316" to the desired length. **3.** Apply the silicone along the floor-wall connection. **4.** Press the arrowhead of "PROINTER KL ACC 316" into the silicone evenly untili t is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

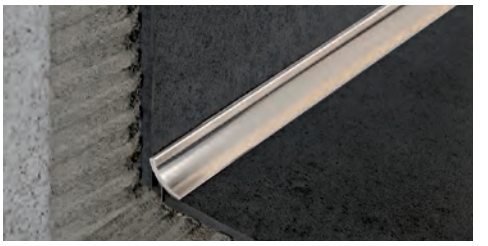

POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm		
PIKLACM 15	15		

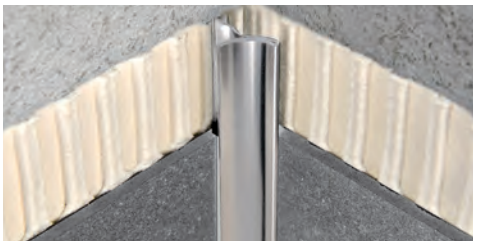

BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm		
PIKLACMS 15	15		

COLOURS



ACM - Polished stainless steel AISI 316/1.4404-V4A
ACMS - Brushed stainless steel AISI 316/1.4404-V4A

IT IS POSSIBLE TO USE THE JOINTS OF PROINTER AC