

PROSHELL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316L/1.4404-V4A

PROSHELL is a cove-shaped profile in polished and brushed stainless steel AISI 316L/1.4404-V4A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

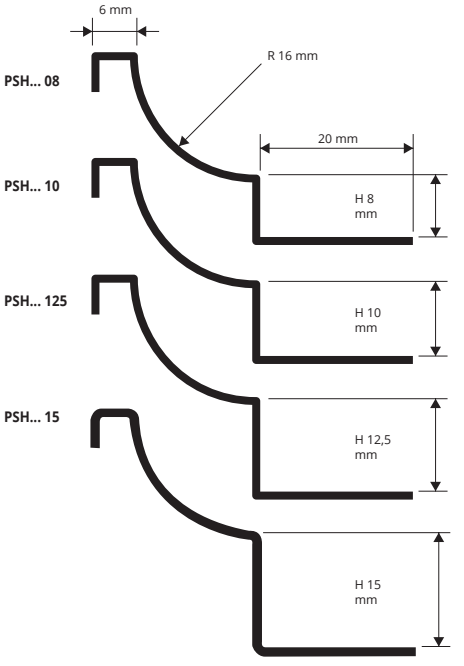

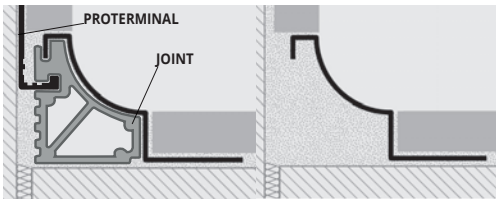



POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film
- bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm		
PSHACM 08	8		
PSHACM 10	10		
PSHACM 125	12,5		
PSHACM 15	15		




BRUSHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film
- bar length **2,7 lm** - pack. **20 Pcs- 54 lm - 10/10 mm**

Article	H mm		
PSHACMS 08	8		
PSHACMS 10	10		
PSHACMS 125	12,5		
PSHACMS 15	15		

BUY PROTERMINAL PVC TO CREATE THE DUAL HEIGHT (SEE BELOW):
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H12,5 mm
Use proterminal PT 12,5 to reach H 15 mm

COLOURS



ACM - Polished stainless steel AISI 316L/1.4404-V4A
ACMS - Brushed stainless steel AISI 316L/1.4404-V4A


EXAMPLES AND INSTRUCTIONS FOR LAYING

1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) **2.** Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSHELL" into the adhesive. **4.** Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC according to the required thickness, see INSTRUCTIONS FOR LAYING.


PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

INTERNAL CORNER
RPI...




EXTERNAL CORNER
RPE...



THREE WAYS CORNER
RPT...







PREWELDED CORNER - POLISHED STAINLESS STEEL
L 100 mm

Article	H mm	
RPIACM ...	08/10/125	
RPIACM 15	15	
RPEACM ...	08/10/125	
RPEACM 15	15	
RPTACM ...	08/10/125	
RPTACM 15	15	

Specify height of joint: E.g.: RPI 8 for H 8 mm.

PREWELDED CORNER - BRUSHED STAINLESS STEEL
L 100 mm

Article	H mm	
RPIACMS ...	08/10/125	
RPIACMS 15	15	
RPEACMS ...	08/10/125	
RPEACMS 15	15	
RPTACMS ...	08/10/125	
RPTACMS 15	15	

Specify height of joint: E.g.: RPIS 8 for H 8 mm.


OVERLAPPING JOINTS
POLISHED AISI 316/.4404 V4A STAINLESS STEEL

Article	
RPSIACM	
RPSEACM	
RPSTACM	
GPSACM	
TPSACM	


OVERLAPPING JOINTS
BRUSHED AISI 316/.4404 V4A STAINLESS STEEL

Article	
RPSIACMS	
RPSEACMS	
RPSTACMS	
GPSACMS	
TPSACMS	

JOINT





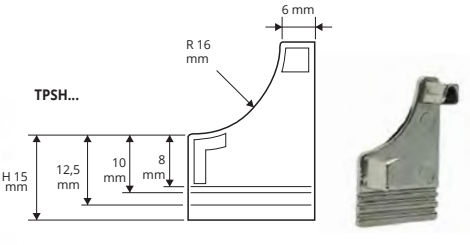

END CAPS R / L - PLASTIC
pack. **2 Pcs** (1 right and 1 left)
PLASTIC JOINTS

Article	
TPSHAC	
TPSHACS	
GISHN 08	
GISHN 10	
GISHN 125	
GISHN 15	

PROGRESS PROFILES