NEWS KALEIDOS

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL ALL** a much sought-after profile that allows a workmanlike application.

PROSHELL ALL

STONE LINE / EASY LINE ALUMINIUM





STONE LINE ALUMINIUM thermo packed
bar length **2,7 M -** pack. **20 Pcs - 54 lm**

Article	H mm		
PSHA 10-SL...	10		
PSHA 125-SL...	12,5		

The code of the selected colour must be added to the article code.
E.g.: PSHA 10-SL... (chosen colour stone white) PSHA 10-SL01.

EASY LINE ALUMINIUM thermo packed
bar length **2,7 M -** pack. **20 Pcs - 54 lm**

Article	H mm		
PSHA 10-EYP01	10		
PSHA 10-EYP11	10		
PSHA 125-EYP01	12,5		
PSHA 125-EYP11	12,5		

COLOURS KALEIDOS

STONE LINE



SL01 - Stone white | **SL02** - Stone cream | **SL04** - Stone sand



SL05 - Stone gray | **SL12** - Stone black


EASY LINE




EYP01 - MATT white varnished (RAL 9016) | **EYP11 -** MATT black varnished

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish. **2.** Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSHELL ALL" into the adhesive. **4.** Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.


PSH... 10

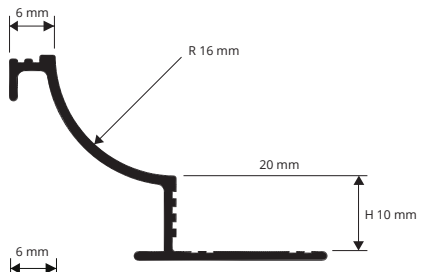

PSH... 125

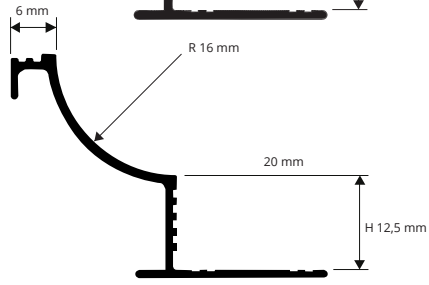

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

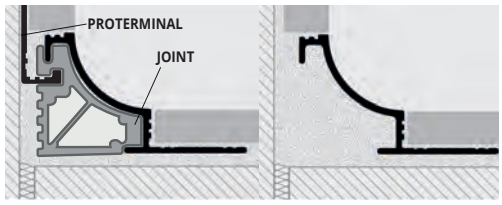

CORNERS, END CAPS and JOINTS

STONE LINE, EASY LINE ALUMINIUM / PLASTIC

EXTERNAL/INTERNAL CORNER - STONE LINE ALUMINIUM

Article	H mm	
RPSHIA ...-SL.../1	10/12,5	
RPSHEA ...-SL../1	10/12,5	

END CAPS R / L - STONE LINE ALUMINIUM
pack. **2 Pcs** (1 right and 1 left)

Article	H mm	
TPSHA ...-SL../1	10/12,5	

JOINTS IN RIGID GREY PLASTIC

Article	H mm	
GISHN 10	10	
GISHN 125	12,5	

EXTERNAL/INTERNAL CORNER - EASY LINE ALUMINIUM

Article	H mm	
RPSHIA 10-EYP01/1	10	
RPSHIA 10-EYP11/1	10	
RPSHIA 125-EYP01/1	125	
RPSHIA 125-EYP11/1	125	
RPSHEA 10-EYP01/1	10	
RPSHEA 10-EYP11/1	10	
RPSHEA 125-EYP01/1	125	
RPSHEA 125-EYP11/1	125	

END CAPS R / L - EASY LINE ALUMINIUM
pack. **2 Pcs** (1 right and 1 left)

Article	H mm	
TPSHA 10/EYP01	10	
TPSHA 10/EYP11	10	
TPSHA 125/EYP01	125	
TPSHA 125/EYP11	125	



INTERNAL CORNER
RPSHI.../1



EXTERNAL CORNER
RPSHE.../1



END CAP
TPSH.../1



JOINT
GISHN.../1

