
PROLEVALL 305

POLISHED STAINLESS STEEL 1.4016
AND POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED


PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.

transition profiles


PLVAC 30/309AS
PLVOL 30/309AS




PLVAC 30/309FS
PLVOL 30/309FS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

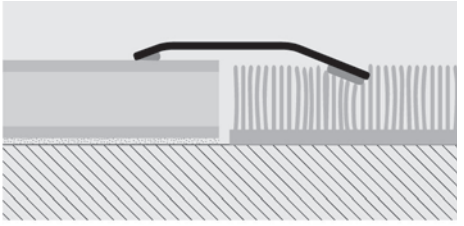

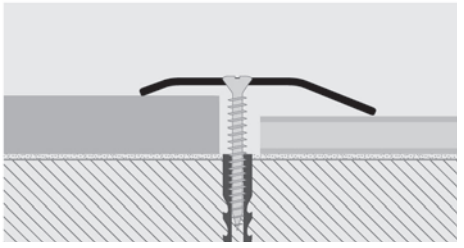

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm		
PLVAC 30A	5 X 30		

POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm		
PLVAC 309AS	5 X 30		


POLISHED BRASS with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm		
PLVOL 30A	5 X 30		

POLISHED BRASS with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm		
PLVOL 309AS	5 X 30		

COLOURS



AC - Polished stainless steel 1.4016 | **OL** - Polished brass



POLISHED STAINLESS ST. 1.4016 punched with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm		
PLVAC 30F	5 X 30		

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm		
PLVAC 309FS	5 X 30		

POLISHED BRASS punched with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm		
PLVOL 30F	5 X 30		

POL. BRASS punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm		
PLVOL 309FS	5 X 30		


PROLEVALL 32

ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED


PROLEVALL 32 are transition profiles in anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 32** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

transition profiles

PLV... 32A/PLV... 32F
PLV... 329AS/PLV... 329FS

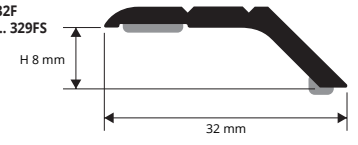

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

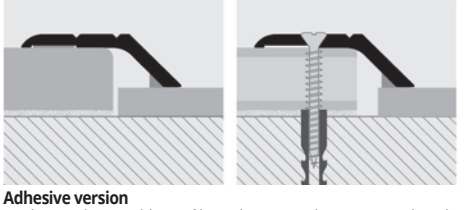

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm		
PLV... 32A	32 X 8		
PLV... 32F	32 X 8		

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item




ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	L x H mm		
PLV... 329AS	32 X 8		
PLV... 329FS	32 X 8		

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS



AA - Anodized silver alum. | **AO** - Anodized gold alum.