
PROPRESS 712

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE


PROPRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.
PROPRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PRSAC 712A/7129AS
PRSOL 712A/7129AS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

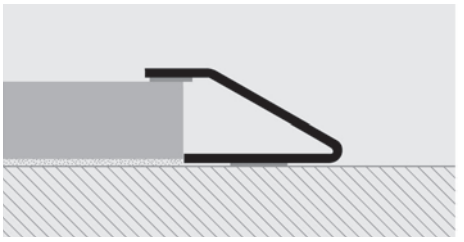

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H x L mm		
PRSAC 712A	27 X 7/12		

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	L x H mm	
PRSAC 7129AS	27 X 7/12	

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
OL - Polished brass



POLISHED BRASS self-adhesive thermo packed bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H x L mm		
PRSOL 712A	27 X 7/12		

POLISHED BRASS self-adhesive thermo packed bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	L x H mm	
PRSOL 7129AS	27 X 7/12	


PROFLOOR 1216

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE


PROFLOOR 1216 is a self-adhesive chamfered terminal transition profile in stainless steel AISI 304/1.4301-V2A and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 12 and 16mm. **PROFLOOR 1216** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PFRAC 1216A/12169AS
PFROL 1216A/12169AS

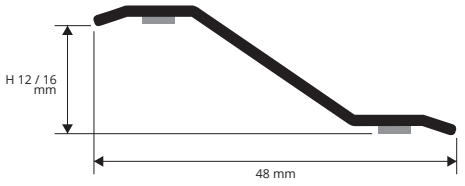

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

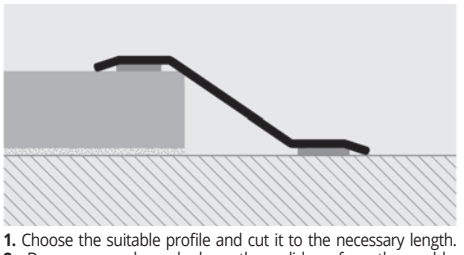

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm		
PFRAC 1216A	48 X 12/16		

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs**

SELF PACK

Article	L x H mm	
PFRAC 12169AS	48 X 12/16	



POLISHED BRASS self-adhesive thermo packed bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	L x H mm		
PFROL 1216A	48 X 12/16		

POLISHED BRASS self-adhesive thermo packed bar length **0,93 lm** - pack. **20 Pcs**

SELF PACK

Article	L x H mm	
PFROL 12169AS	48 X 12/16	

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
OL - Polished brass