PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLINOLEUM

ANODIZED SILVER ALUMINIUM
WITH AND WITHOUT SELF-ADHESIVE



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H x L mm		
PLUAA 16	2,5 X 16		

ANODIZED SILVER ALUMINIUM thermo packed - WITH ADHESIVE -
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	H x L mm		
PLUAA 16A	2,5 X 16		

COLOURS




AA - Anodized silver alum.

PLU ... 16
PLU ... 16A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

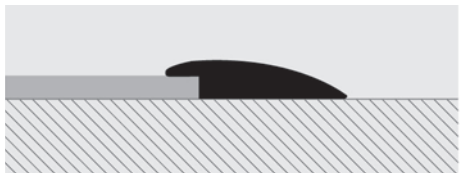

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	L x H mm		
PFRAC 24A	2/4,5 X 30		

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,93 lm**- pack. **20 Pcs**

SELF PACK

Article	L x H mm	
PFRAC 249AS	2/4,5 X 30	



POLISHED BRASS self-adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	L x H mm		
PFROL 24A	2/4,5 X 30		

POLISHED BRASS self-adhesive thermo packed
bar length **0,93 lm** - pack. **20 Pcs**

SELF PACK

Article	L x H mm	
PFROL 249AS	2/4,5 X 30	


COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A

OL - Polished brass

PFRAC 24A/249A
PFROL 24A/249A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

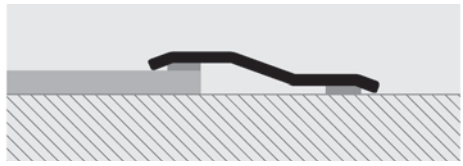

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses