

PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER

ANODIZED AND POLISHED



POLISHED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	Pcs/Pack	L x H mm		
PCRBC 149	40	14 X 9		
PCRBO 149	40	14 X 9		

bar length **0,90 lm** - pack. **40 Pcs**


Article	Pcs/Pack	L x H mm	
PCRAA 1499	40	14 X 9	
PCRDB 1499	40	14 X 9	
PCRBC 1499	40	14 X 9	
PCRAA 2699	40	26 X 9	

ANODIZED ALUMINIUM
thermo packed - bar length **2,7 lm**


ECO BLISTER

Article	Pcs/Pack	L x H mm		
PCRAA 149	40	14 X 9		
PCRAO 149	40	14 X 9		
PCRAB 149	40	14 X 9		
PCRAT 149	40	14 X 9		
PCRDB 149	40	14 X 9		
PCRAG 149	40	14 X 9		
PCRNEO 149	40	14 X 9		
PCRAA 209	40	20 X 9		
PCRAO 209	40	20 X 9		
PCRAB 209	40	20 X 9		
PCRAT 209	40	20 X 9		
PCRDB 209	40	20 X 9		
PCRAG 209	40	20 X 9		
PCRNEO209	40	20 X 9		
PCRAA 269	40	26 X 9		
PCRAO 269	40	26 X 9		
PCRAB 269	40	26 X 9		
PCRAT 269	40	26 X 9		
PCRDB 269	40	26 X 9		
PCRAA 409	20	40 X 9		


PCR... 149/1499




PCR... 209




PCR... 269
PCRAA 409



COLOURS

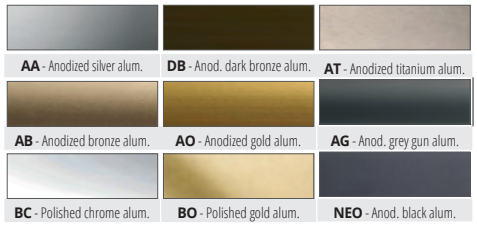

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM
IN WOODEN FINISHES

ALUMINUM COVERED WOODEN FINISHES thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm (L 26 mm - 54 lm)**

Article	L x H mm		
PCRA... 149	14 X 9		
PCRA... 269	26 X 9		


The code of the selected colour must be added to the article code.
Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.




COLOURS




PCRA... 149



PCRA... 269



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER


Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN/RUBBER
length **2,7 lm** and/or **in rolls 100 lm**


Article	lm			
PCPCR	2,7			
PCPCR	100			

PROINSERT BASE 45 AND BASE 40 - alum. punched - perfored
bar length **2,7 lm**- pack. **20 Pcs - 54 lm**

Article	Larg. mm		
PINBFT 45	45		
PINBFT 40	40		

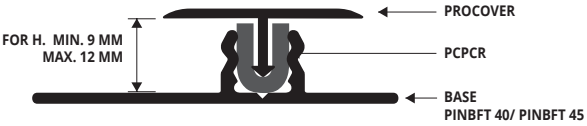

INSERT
+BASE 45/40

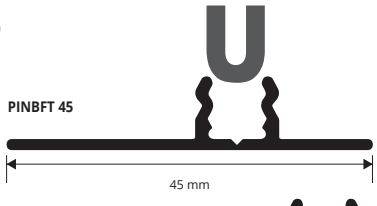

PINBFT 40

