


PROELEGANT

NATURAL, POLISHED
AND CHROMED BRASS

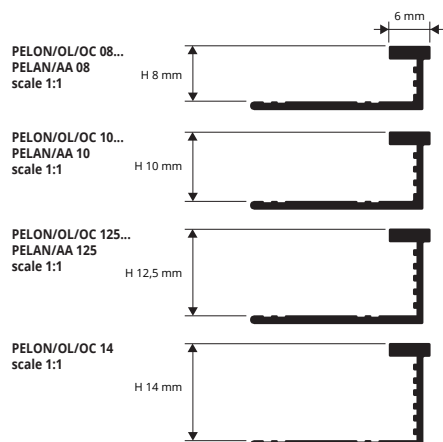

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PELOL 08	8		
PELOL 10	10		
PELOL 125	12,5		
PELOL 14	14		



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELOC 08	8		
PELOC 10	10		
PELOC 125	12,5		
PELOC 14	14		

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

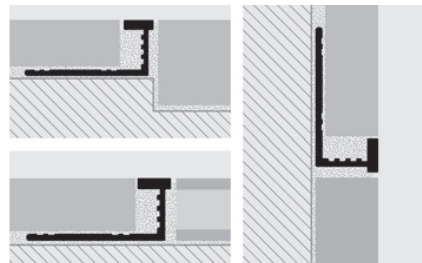

1. Choose the "PROELEGANT" with the same height as the thickness of the wall covering/floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELON 08	8		
PELON 10	10		
PELON 125	12,5		
PELON 14	14		


COLOURS

OC - Chromed brass	OL - Polished brass	ON - Natural brass

PROELEGANT

NATURAL ALUMINIUM AND
ANODIZED ALUMINIUM

EXAMPLES OF LAYING (for instructions see the product above)

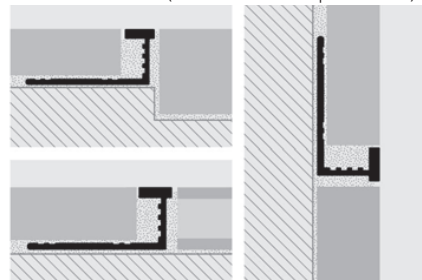

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAN 08	8	5,40	14,58
PELAN 10	10		15,50
PELAN 125	12,5		16,44


COLOURS

AN - Natural alum.	AA - Anodized silver alum.	AT - All. anodizz. titanium
NEO - Anodized black		



ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAA 08	8		
PELAT 10	10		
PELNEO 10	10		
PELAA 125	12,5		
PELAT 125	12,5		
PELNEO 125	12,5		

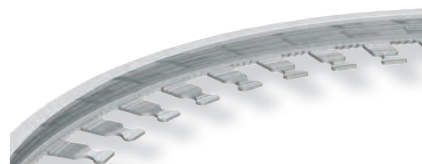

Curve available, see page 103