




PROLEVALL 305

POLISHED STAINLESS STEEL 1.4016
AND POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED

transition profiles

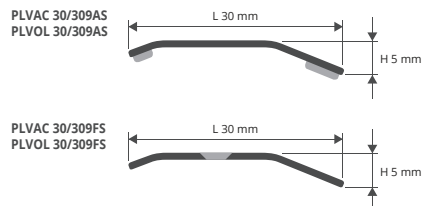

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

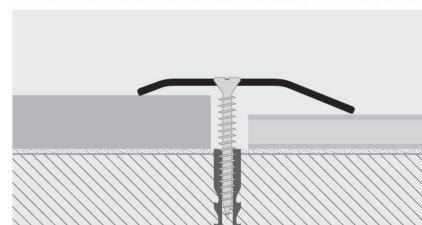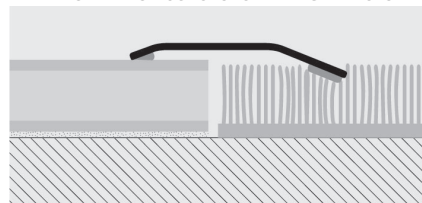

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm		
PLVAC 30A	5 X 30		

POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pc  **SELF PACK**

Article	H x L mm		
PLVAC 309AS	5 X 30		

POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm		
PLVOL 30A	5 X 30		

POLISHED BRASS with adhesive thermo packed  **SELF PACK**
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm		
PLVOL 309AS	5 X 30		

COLOURS

	
AC - Polished stainless steel 1.4016	OL - Polished brass



POLISHED STAINLESS ST. 1.4016 punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm		
PLVAC 30F	5 X 30		

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc  **SELF PACK**

Article	H x L mm		
PLVAC 309FS	5 X 30		

POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm		
PLVOL 30F	5 X 30		

POL. BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pc  **SELF PACK**


Article	H x L mm		
PLVOL 309FS	5 X 30		

ON DEMAND HAND-BRUSHED STAINLESS STEEL
(Price to be agreed. Production delay 4/5 weeks)


PROLEVALL 32

ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED

transition profiles

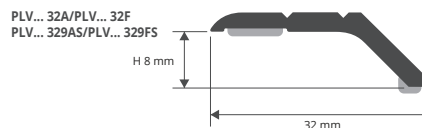

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

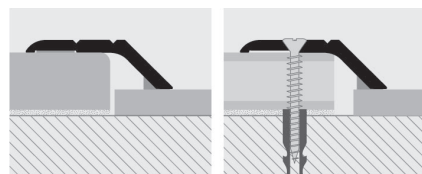

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm		
PLV... 32A	32 X 8		
PLV... 32F	32 X 8		

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

Available in the colours: AA - AO (AB - AT, CH e SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS

	
AA - Anodized silver alum.	AO - Anodized gold alum.




ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 0,93 lm - pack. 20 Pc  **SELF PACK**

Article	L x H mm		
PLV... 329AS	32 X 8		
PLV... 329FS	32 X 8		

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height

			
AB - Anodized bronze alum.	AT - Anodized titanium alum.	CH - Anod. champagne alum.	SB - Anodized sand alum.

(Price to be agreed. Production delay 4/5 weeks)