**PROJOLLY SQUARE** is a square corner bead profile in chromed brass or antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and elegance and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

# PROJOLLY SQUARE

CHROMED BRASS, BRUSHED AND ANTIQUE BRASS



**CHROMED BRASS thermo Packed**
bar length **2,7 lm** - Pack **20 Pcs - 54 lm**

| Article | H mm | | |
|---|---|---|---|
| PJQSOC 045 | 4,5 | | |
| PJQSOC 06 | 6 | | |
| PJQSOC 08 | 8 | | |
| PJQSOC 10 | 10 | | |
| PJQSOC 125 | 12,5 | | |

**ANTIQUE BRASS thermo Packed** bar length **2,7 lm**
Pack **20 Pcs - 54 lm (PJQSOB 125 -** Pack **10 Pcs)**

| Article | H mm | | |
|---|---|---|---|
| PJQSOB 08 | 8 | | |
| PJQSOB 10 | 10 | | |
| PJQSOB 125 | 12,5 | | |

**COLOURS**



**OC** - Chromed brass | **OB** - Antique brass | **OS** - Brushed brass




**BRUSHED BRASS thermo Packed**
bar length **2,7 lm** - Pack **20 Pcs - 54 lm**


| Article | H mm | | |
|---|---|---|---|
| PJQSOS 06 | 6 | | |
| PJQSOS 10 | 10 | | |
| PJQSOS 125 | 12,5 | | |

**INSTRUCTIONS FOR LAYING**

**1.** Choose "PROJOLLY SQUARE" according to the tile thickness. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

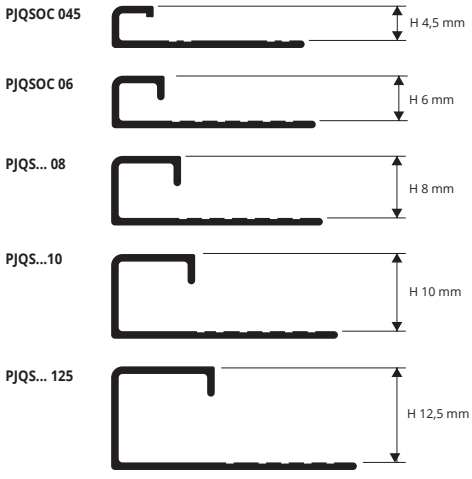


**EXAMPLES OF LAYING**

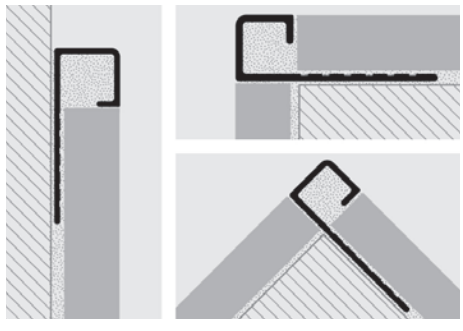

# CAPSULES, END CAPS and THREE-WAYS JOINTS

CHROMED BRASS, BRUSHED AND ANTIQUE BRASS - PLASTIC

**CAPSULES and END CAPS - CHROMED BRASS**

| Article | H mm | |
|---|---|---|
| CPJQSOC .../1 | 045/06/08/ 10/125 | |
| TPJQSOC .../1 | 045/06/08/ 10/125 | |

Choose the desired height
Ex.: 10 mm capsule in 1 Pcs Pack - **CPJQSOS 10/1**

**JOINTS - PLASTIC**

| Article | H mm | |
|---|---|---|
| GIJQ ... | 045/06/08/ 10/125 | |

**CAPSULES and END CAPS - ANTIQUE BRASS**

| Article | H mm | |
|---|---|---|
| CPJQSOB .../1 | 08/10/125 | |
| TPJQSOB .../1 | 08/10/125 | |

Choose the desired height
Ex.: 10 mm capsule in 1 Pcs Pack - **CPJQSOB 10/1**

**CAPSULES and END CAPS - BRUSHED BRASS**

| Article | H mm | |
|---|---|---|
| CPJQSOS .../1 | 06/10/125 | |
| TPJQSOS .../1 | 06/10/125 | |

Choose the desired height
Ex.: 10 mm capsule in 1 Pcs Pack - **CPJQSOS 10/1**

**JOINT**




GIJQ ...

**CAPSULE**



CPJQSOC .../1

**END CAP**



TPJQSOC .../1

